

FLUSHMATE®

INTELLI-Flush™ Automatic Flushing System

With Hand-Wave
Flush Option



INTELLI-Flush™, the first battery-operated retrofit for existing **FLUSHMATE** equipped water closets.



Retrofit Design Sets Touch-Free Standard for Electronic Flushing.

FLUSHMATE®'s *INTELLI-Flush*™ enables touchless, electronic sensor operation of existing *FLUSHMATE* units. Reduces the spread of bacteria, recurring odors and adds the convenience of automatic flushing. Combines all the water-saving and superior performance advantages of *FLUSHMATE* with the convenience of no-touch operation.

INTELLI-Flush Design Features:

- Battery-activated (no electricity)
- Infrared technology ensures toilets are always flushed, user pick-up or hand-wave
- Adjustable flush delay, 5 or 7 second
- Touch-free design promotes hygiene
- Greatly reduces restroom odors
- Ideal where physical flushing limitations are a concern, ADA compliant
- Quick and simple installation
- Override button included
- Contemporary design enhances restroom décor
- Choose from chrome or white on sensor trim
- Four C Cell and four AA cell alkaline batteries included
- Three year expected battery life
- 3 year limited warranty
- 24 hour flush cycle feature (Ideal for commercial applications)

FLUSHMATE®

INTELLI-Flush™ Automatic Flushing System

Exclusive Electronic Retrofit Kit for FLUSHMATE®

- Proven Infrared Object Lock Technology controls flushing like no other system
- Ideal for new 1.0 gallon, 1.28 gallon, or 1.6 gallon FLUSHMATE systems or updating previous models*
- Field-tested design
- Sensor includes adjustable sensor range, adjustable flush delay, 5 or 7 second. 24 hour flush cycle switch.
- Switchable feature to “wave only” actuation.
- Green LED flashes when user is detected
- Yellow LED flashes for low battery
- Easy to install on-wall sensor system
- Sealed battery compartment
- Factory preset for optimum operation
- Easy to follow instructions included
- Retrofits to FLUSHMATE 501-B, 503, and 504
- Sensor trim available in chrome or white

ON WALL SENSOR



Quick and Easy Installation

Remove lid, actuator rod and flush handle; install appropriate adapter; mark wall and install flush module in position; install override button and batteries; plug in override button wire and battery pack...you're finished. Tools required: Phillips and slotted screwdrivers, pliers and ruler.


INTELLI-Flush* is ready to install on any of the following series:



FLUSHMATE® II 501-B **FLUSHMATE® III** 503 **FLUSHMATE® IV** 504**

*Not intended for use on 200, 500, 501, or 501-A series FLUSHMATE.
**Does not support Mancesa and Vitromex fixtures.

INTELLI-Flush™ is easy to use:

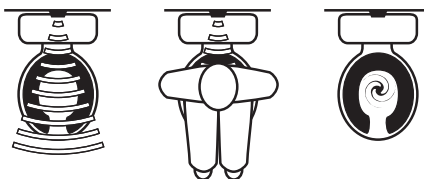

Sensor waits to detect user

Whether sitting or standing, user must be within range for at least 8 seconds

Fixture automatically flushes 5 or 7 seconds after user leaves the sensor range

DESCRIPTION	CODE NO.	LIST PRICE
INTELLI-Flush On-Wall Sensor, with white trim	K-100100	\$162.50
INTELLI-Flush On-Wall Sensor, with chrome trim	K-100101	\$167.75
INTELLI-Flush, with override button – no sensor	K-100500	\$110.64

Sloan FLUSHMATE...making electronic conversion easy.



SLOAN FLUSHMATE®

30075 Research Drive
New Hudson, MI 48165
www.flushmate.com

ISO 9001 Quality System Certified



The information contained in this document is subject to change without notice.
©2010 Sloan Valve Company
Printed in the U.S.A. FLU6128.6 5/10