



Two-Piece Pressure-Assist Water Closet

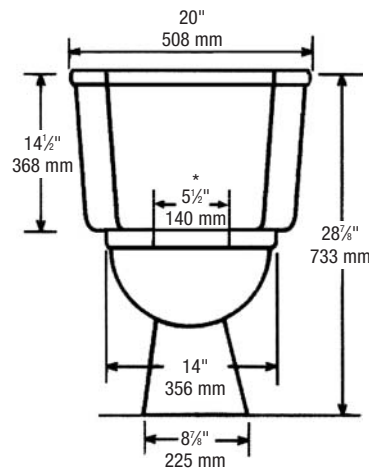

Ultra-low flush, less than 1.0 gpf/3.8 Lpf, vitreous china toilet. Close coupled toilet with bolt caps, left-hand tank lever and **FLUSHMATE IV®** Flushometer tank operating system. Minimum water supply pressure 35 psi static.

PREDATOR™ Elongated Front Toilet

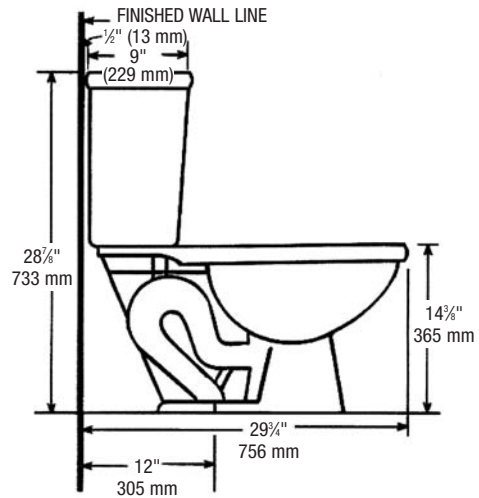

*5 1/2" (140 mm) SPREAD TANK TO BOWL BOLTS



1606

606 Bowl

1 Tank

Available in all new colors

PREDATOR™ ADA Compliant

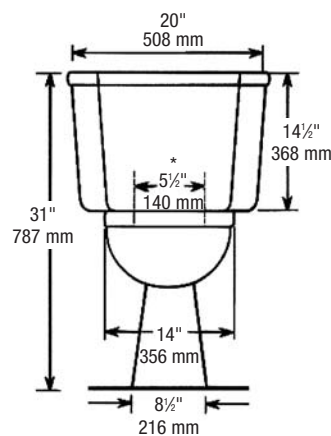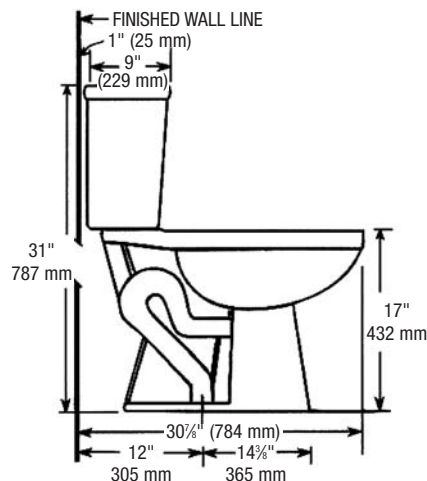

*5 1/2" (140 mm) SPREAD TANK TO BOWL BOLTS

1608

608 Bowl

1 Tank

Available in White, Bone & Biscuit



To Be Specified:

- Color:
- Seat:
- Supply with Stop:

This space for Architect/Engineer approval.



Sloan **FLUSHMATE®** • 30075 Research Drive • New Hudson, MI 48165
Ph: (800) 875-9116 • Fax: (847) 671-3922 • Web: www.flushmate.com