


# Pressure-Assist Water Closet Equipped with *FLUSHMATE*<sup>®</sup>



PROFLO<sup>®</sup> vitreous china tank and bowl combination, pressure assisted with *FLUSHMATE IV*<sup>®</sup>, Flushometer tank system that flushes less than 1.0 gallon/3.8 liters. Tank available trimmed with chrome plated flush lever. Available in white only. Minimum water supply pressure 35 psi static.


## PROFLO<sup>®</sup> 1.0 GPF Elongated Front Toilet

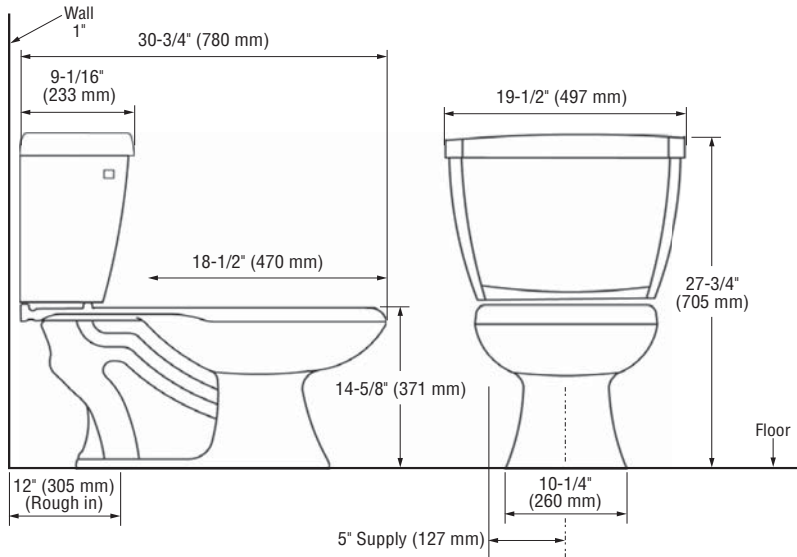

### PF1600 Series

- PF1601PAWH Bowl
- PF1612PAWH Tank with left-hand lever
- PF1612PARWH Tank with right-hand lever

## PROFLO<sup>®</sup> 1.0 GPF Elongated Front ADA Toilet

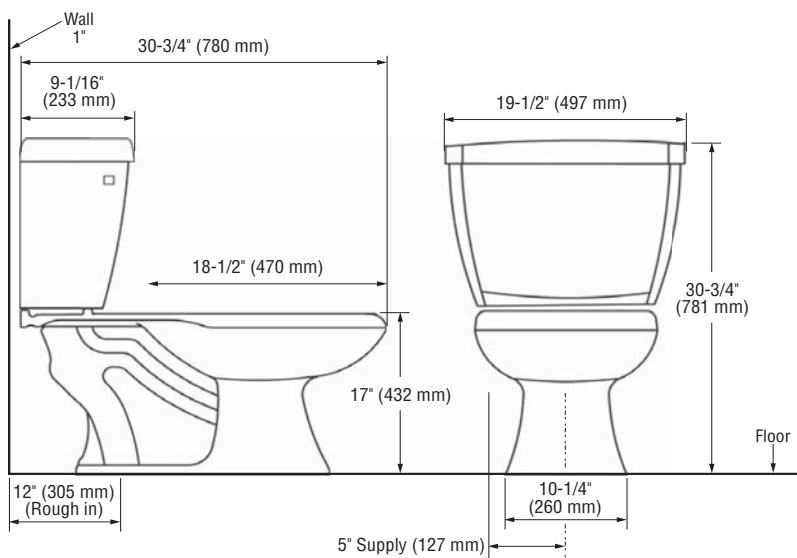

### PF1600 Series

- PF1603PAWH Bowl
- PF1612PAWH Tank with left-hand lever
- PF1612PARWH Tank with right-hand lever

#### To Be Specified:

- Seat:
- Supply with Stop:

This space for Architect/Engineer approval.



Sloan *FLUSHMATE*<sup>®</sup> • 30075 Research Drive • New Hudson, MI 48165  
Ph: (800) 875-9116 • Fax: (847) 671-3922 • Web: [www.flushmate.com](http://www.flushmate.com)