

- ☐ **564854** **1.0 GPF Pressure Assist Tank**
☐ **564814** **Elongated Bowl**

Product Specs:

- High efficiency pressure assist toilet
- 3.8 Lpf / 1.0 Gpf
- **Elongated bowl**
- Vitreous china
- **17" Bowl height**
- Chrome tank lever actuator
- **4-1/4" Rough-in**
- Back outlet flange
- 2" Fully glazed ball pass trapway
- Siphon jet flush action
- Sloan Flushmate® pressure assist flush kit, 10 year warranty
- Water surface: (295mm x 198mm) 11-5/8" x 7-3/4"
- 100% Factory flush tested
- Available color: white


Notes:

Important: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Overall Dimensions:

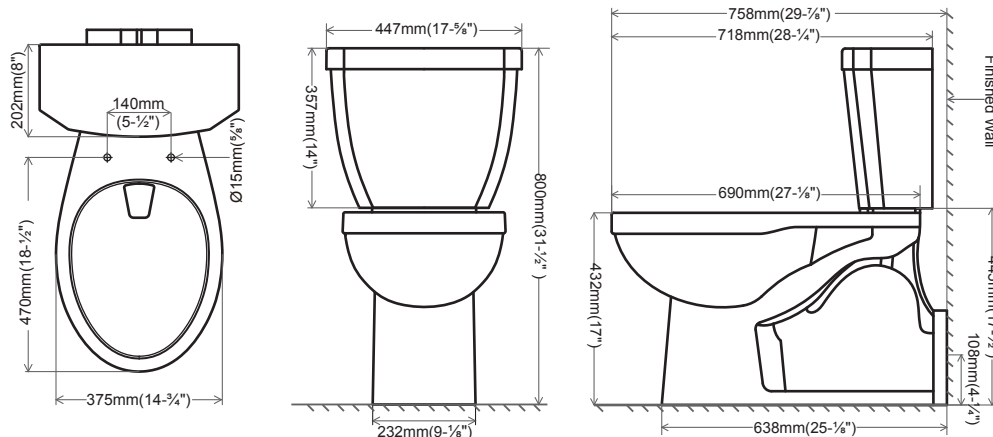
447mm(W) x 758mm(D) x 800mm(H)

17-5/8"(W) x 29-7/8"(D) x 31-1/2"(H)

Compliance Certifications:

Meets or exceeds the following:

- IAPMO Green UPC
- US EPA WaterSense
Note: To comply with WaterSense certification, the 564814 bowl must be installed with the 564854 tank.
- ASME A112.19.2/CSA B45.1-2013
- ADA Guidelines & ANSI A117.1
- **MaP tested 1000g**
- Calgreen & LEED Compliant


Repair Parts:


566854
Tank Lid

